


OVERVIEW

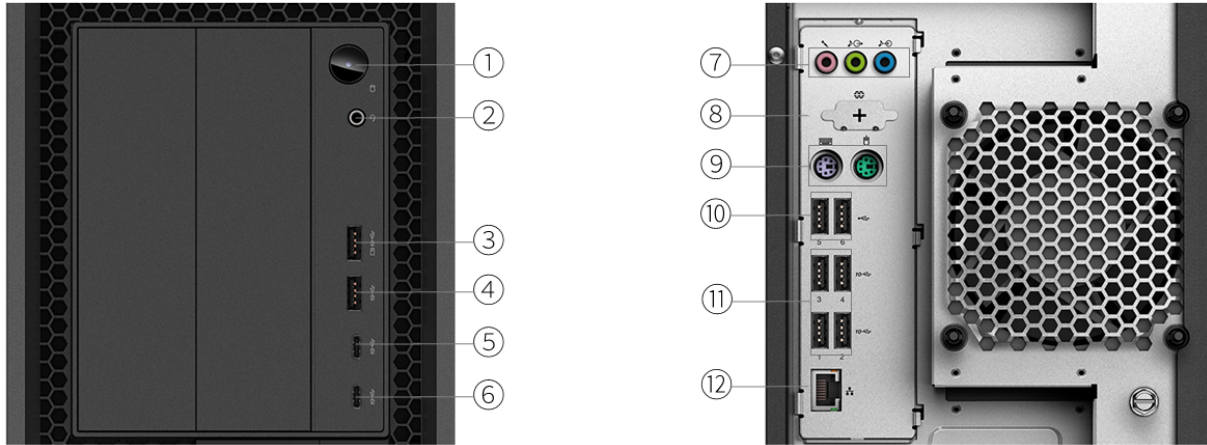

1. Power button	7. 3x Audio ports (3.5mm)
2. Headphone / microphone combo jack (3.5mm)	8. Serial *
3. USB 3.2 Gen 2	9. 2x PS/2 ports (keyboard / mouse)
4. USB 3.2 Gen 2	10. 2x USB 2.0
5. USB-C 3.2 Gen 2	11. 4x USB 3.2 Gen 2
6. USB-C 3.2 Gen 2	12. Ethernet (10GbE RJ-45)

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Up to one AMD Ryzen™ Threadripper PRO Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen Threadripper PRO 3945WX	12	24	4.0GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-
AMD Ryzen Threadripper PRO 3955WX	16	32	3.9GHz	4.3GHz	8MB L2 / 64MB L3	DDR4-3200	-
AMD Ryzen Threadripper PRO 3975WX	32	64	3.5GHz	4.2GHz	16MB L2 / 128MB L3	DDR4-3200	-
AMD Ryzen Threadripper PRO 3995WX	64	128	2.7GHz	4.2GHz	32MB L2 / 256MB L3	DDR4-3200	-

Processor Sockets

1x Socket SP3

Operating System

Operating System**

- Windows® 10 Pro 64
- Ubuntu Linux LTS
- No operating system

Graphics

Discrete Graphics Support

Supports up to two NVIDIA® Quadro® RTX 8000 with NVLink

Discrete Graphics Offering***

Graphics	Memory	Power	Connector	SLI / NVLink
Quadro P620	2GB GDDR5	40W	4x miniDP 1.4	None
Quadro P1000	4GB GDDR5	50W	4x miniDP 1.4	None
Quadro P2200	5GB GDDR5	75W	4x DP 1.4	None
NVIDIA T600	4GB GDDR6	40W	4x miniDP 1.4	None
NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None
Quadro RTX 4000	8GB GDDR6	160W	3x DP 1.4, 1x VirtualLink	None
Quadro RTX 5000	16GB GDDR6	265W	4x DP 1.4, 1x VirtualLink	NVLink
Quadro RTX 6000	24GB GDDR6	295W	4x DP 1.4, 1x VirtualLink	NVLink
Quadro RTX 8000	48GB GDDR6	295W	4x DP 1.4, 1x VirtualLink	NVLink
NVIDIA RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	None
NVIDIA RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	None
NVIDIA RTX A6000	48GB GDDR6 with ECC	300W	4x DP 1.4a	None
Quadro GV100	32GB HBM2	250W	4x DP 1.4	NVLink
AMD Radeon™ Pro WX 3200	4GB GDDR5	50W	4x miniDP 1.4	-
AMD Radeon Pro W5500	8GB GDDR6	125W	4x DP 1.4	-
AMD Radeon Pro W5700	8GB GDDR6	205W	5x miniDP 1.4, 1x USB-C	-
AMD Radeon Pro VII	16GB HBM2	250W	6x DP 1.4	-

Monitor Support

Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

AMD WRX80

Memory

Max Memory^[1]

Up to 1TB (8x 128GB DDR4-3200 RDIMMs)

Memory Type

DDR4-3200 RDIMM ECC

Memory Slots

8 DDR4 DIMM slots, 8 channels capable

Memory Protection

ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to 5x 3.5" SATA HDD + 9x M.2 SSD

- 3.5" HDD up to 4TB each
- M.2 SSD up to 2TB each

Storage Type^{***}

Disk Type	Interface	RPM	Offering
3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB
M.2 PCIe SSD	PCIe NVMe, PCIe 3.0	-	256GB / 512GB / 1TB / 2TB
M.2 PCIe SSD	PCIe NVMe, PCIe 4.0	-	256GB / 512GB / 1TB / 2TB

Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe controller	Standard	PCIe NVMe	0/1/10/5	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	0/1/10/5	None

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM or DVD±RW

Card Reader

- 15-in-1 card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC4050H codec

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
1000W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Tower (33L)

Dimensions (WxDxH)

Models	Dimensions
All models	165 x 460 x 446 mm (6.5 x 18.1 x 17.6 inches, with feet)

Weight

Models	Weight
All models	24 kg (52.91 lbs, maximum configuration)

Bays

- 2x 3.5" disk bay (standard)
- 3x 3.5" disk bay (optional):
 - 2 bays come with 3rd disk or Storage Bay Upgrade Kit
 - 1 bay via flex bay

Flex Bays

1x flex bay, supports one of the following:

- Front Access Storage Enclosure
- 5.25" Slim ODD and HDD cage

M.2 Slots

Up to 11x M.2 SSD:

- 2 via onboard slots
- 8 via Quad M.2 to PCIe adapters (only supports PCIe 3.0 SSD)
- 1 via Single M.2 to PCIe adapter (only supports PCIe 3.0 SSD)

Expansion Slots

- Two PCIe 4.0 x8
- Four PCIe 4.0 x16

Expansion Slots Offering

Slot 1: PCIe 4.0 x16, full height, full length, by CPU
 Slot 2: PCIe 4.0 x8, full height, full length, by CPU
 Slot 3: PCIe 4.0 x16, full height, full length, by CPU
 Slot 4: PCIe 4.0 x16, full height, full length, by CPU
 Slot 5: PCIe 4.0 x16, full height, full length, by CPU
 Slot 6: PCIe 4.0 x8, full height, full length, by IOH

CONNECTIVITY

Network

Onboard Ethernet

10GbE Ethernet, Marvell AQtion AQN-107, 1x 10GbE RJ-45

Optional Ethernet

Additional Ethernet options via PCIe adapter

WLAN + Bluetooth®

- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.1
- No WLAN and Bluetooth

Ports⁽¹⁾

Front Ports

- 1x USB 3.2 Gen 2
- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 2x USB-C 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports^[2]

- 2x USB 2.0
- 4x USB 3.2 Gen 2
- 2x PS/2 ports (keyboard / mouse)
- 1x Ethernet (10GbE RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)
- 1x microphone (3.5mm)

Optional Rear Ports^{***}

- 1x Thunderbolt™ 3
- 1x serial

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
 - USB 2.0: 480 Mbit/s;
 - USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
 - USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
 - USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
 - Thunderbolt 3: 40 Gbit/s;
 - FireWire 400: 400 Mbit/s;
 - FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) Access Panel Lock Kit with Common Key
- (Optional) Access Panel Lock Kit with Unique Key
- Kensington® Security Slot

Chassis Intrusion Switch

Chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password

MANAGEABILITY

System Management

System Management

AMD Pro Manageability

Diagnostic

Diagnostic

- Photo-audio transfer with Lenovo PC Diagnostics for Android™ and iOS
- ThinkStation® Diagnostics for Windows
- Front 4-digit diagnostic
- Lenovo UEFI Bootable Diagnostics

SERVICE

Warranty

Base Warranty

3-year limited onsite service with 9x5 NBD (for most models)

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Silver
- ENERGY STAR® 8.0 (on model 30E00006US)
- GREENGUARD®
- RoHS compliant

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with "***" means that only one offering listed under the feature is configured on selected models.
- Feature with "****" means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

